


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.53V I:0.1063A P:9.3657W PF:0.3821 Freq:59.99Hz Lamp Flux:1005x1 lm		
NAME: FORM-17	TYPE: LINEAR LIGHTING	WEIGHT:
SPEC.: WW, NICHIA	DIM.: 1000 x 17.1 x 8	SERIAL No.: 3585
MFR.: K-LITE	SUR.:	Shielding Angle: 100°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3256	Imax (cd)	179.5	S/MH (C0/180)	1.34
NOMINAL POWER (W)	10	LOR (%)	52.7	S/MH (C90/270)	1.30
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	529.89	η UP, DN (C0-180)	0.0, 25.7
NOMINAL FLUX (lm)	1005	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	230	η down (%)	52.7	CIBSE SHR MAX	1.50

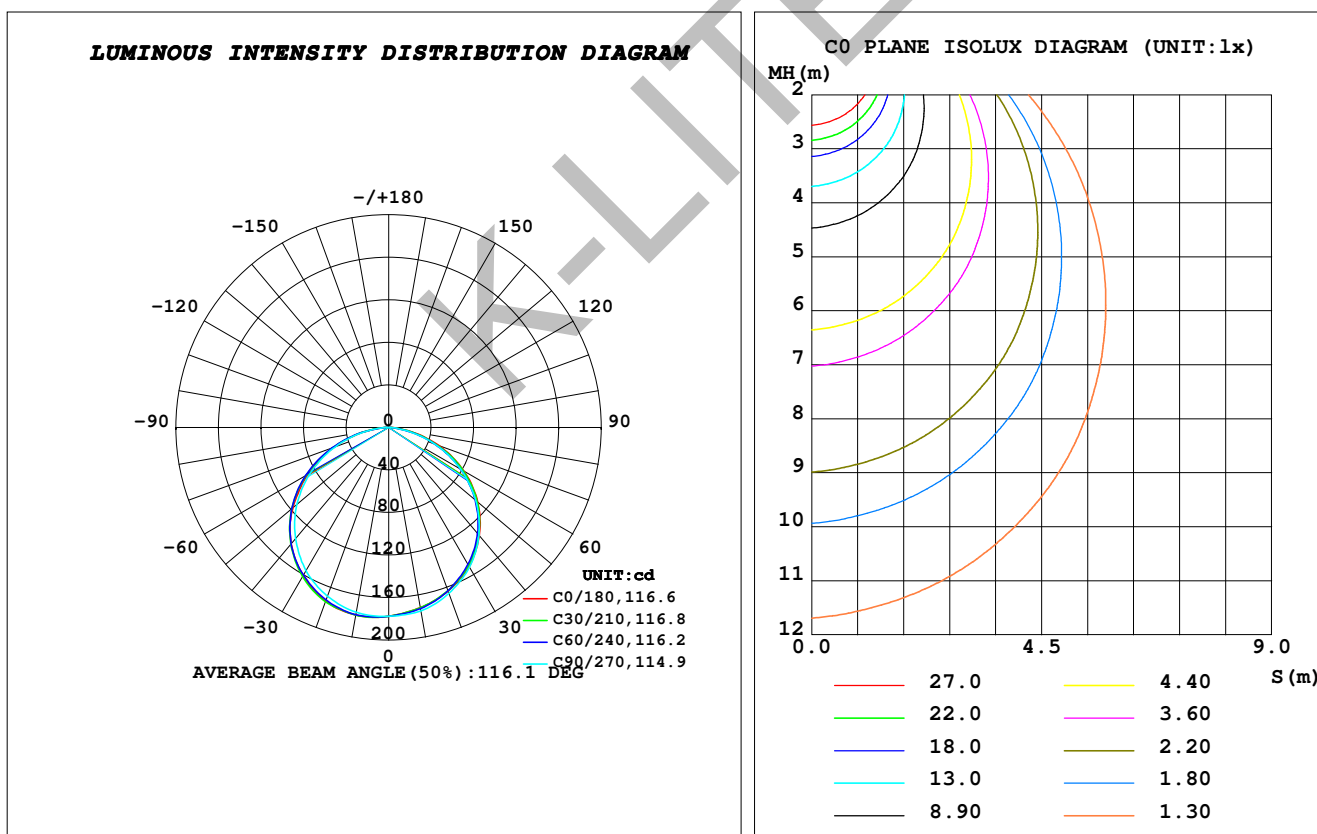

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 25 September 2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: