

The environmentally friendly LED garden and pathway luminaires is both sustainability and user comfort. Its emphasis on creating a pleasant light distribution and high visual comfort, they cater to the needs of outdoor spaces while minimizing glare and discomfort for those in the vicinity.

Product Description

- Luminaire made of Stainless Steel Pipe (grade 304) & Pressure die cast aluminium pyro top.
- Non yellowing UV stabilized translucent acrylic diffuser
- Mounting spike / die cast aluminium base arrangement to facilitate easy installation at any desired location.
- Constant voltage non integral power supply
- Low Voltage at 24V dc assures safety.
- Ordering guide : KL-4560-CCT (Colour Temperature)
- Available CCT : 2700K / 3000K / 4000K / 5700K



Product Benefits

- Timeless modern design, quick & simple installation.
- Soft diffused lighting provides pedestrians glareless and distinctive lighting with exceptional visual comfort.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Suitable for gated community and non-public / low density public areas.

Available Finish

Pure polyester powder coated

RAL 9004 Signal black


RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

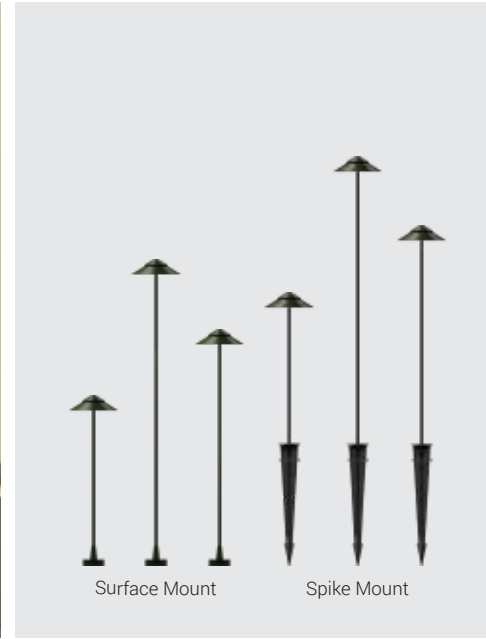

Technical Specifications

General

ID : 4560
 System Wattage : 6W LED
 Driver Non-Integral : Constant Voltage
 Operating Voltage : 24Vdc
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : LUMILEDS / OSRAM
 CRI (Ra) : ≥80
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

Physical

Body : Stainless Steel Pipe with Die-Cast Aluminium
 Diffuser : Translucent acrylic
 Mounting : Surface / Earth spike
 Finish : Polyester powder coated
 RAL 9004 Signal black
 RAL 9007 Grey aluminium
 RAL 7016 Anthracite grey
 Graphite grey

Driver

Power Supply : Non-Integral

Optical Performance

Light Distribution : Symmetrical

