

K-LITE



Elements

DESIGN SERIES



ELINA

Effortless Comfort

Elina highlights architectural elegance through its refined vertical metal structure, complemented by the gentle contours of a decorative diffuser. The textured diffuser ensures controlled light diffusion, producing soft, patterned illumination across architectural surfaces and landscaped areas.



ELINA

An eco-friendly LED garden and pathway luminaire designed for sustainability and superior visual comfort. With smooth light distribution and glare control, it creates a pleasant and safe lighting environment for outdoor pathways and landscaped areas.

MATERIAL

Body	: Extruded aluminium tube (grade 6063)
Diffuser	: PMMA
Ingress Protection	: IP65
Mounting	: Pressure die cast aluminium mounting base

ELECTRICAL

Driver	: Constant Voltage
Power Supply	: Non-Integral
Operating Voltage	: 24Vdc

PRODUCT CONFIGURATIONS

Wattage	: 1 x 6W / 2 x 6W LED
Beam Angle	: 120°
CCT	: 2700K / 3000K / 4000K / 5700K
LED Life Time	: L70 B10 60,000 H

AREA OF APPLICATION

Suitable for low traffic areas

AVAILABLE FINISH

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey

Note : Luminaire to be ordered with suitable power supply and IP Junction box





Technical Specifications

General

ID	: 22569
System Wattage	: 1 x 6W / 2 x 6W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: PMMA
Mounting	: Surface
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source



Light Source	: NICHIA
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver

Power Supply	: Non-Integral
--------------	----------------

Optical Performance

Optical Beam Angle	: 120°
--------------------	--------

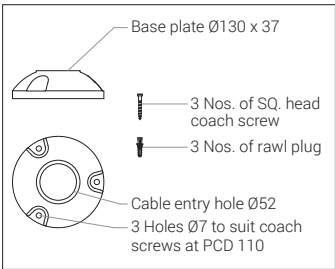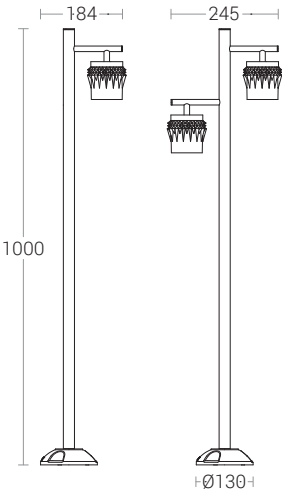



WALL ELINA

Our surface-mounted range of wall lights is an ideal solution for a wide range of outdoor lighting applications. Designed to effectively illuminate the area in front of the luminaire, they also create attractive light accents on vertical surfaces. Built with durable construction, these luminaires provide long-lasting protection against the ingress of dust, moisture, and insects, ensuring reliable performance in outdoor environments.

MATERIAL

Body	: Extruded aluminium tube (grade 6063)
Diffuser	: PMMA
Ingress Protection	: IP65
Mounting	: Pressure die cast aluminium wall mounting base

ELECTRICAL

Driver	: Standard
Power Supply	: Integral
Input Voltage	: 230-240Vac / 50-60 Hz

PRODUCT CONFIGURATIONS

Wattage	: 6W LED
Beam Angle	: 120°
CCT	: 2700K / 3000K / 4000K / 5700K
LED Life Time	: L70 B10 60,000 H

AREA OF APPLICATION

Residential, Building facade, Commercial centres, Passages, Pathways.

AVAILABLE FINISH

Pure polyester powder coated

RAL 9004 Black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey





Technical Specifications

General

ID	: 22570
System Wattage	: 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium & Die cast Aluminium
Diffuser	: PMMA
Mounting	: Surface - Wall
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source

Light Source	: NICHIA
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver

Power Supply	: Integral
--------------	------------

Optical Performance

Optical Beam Angle	: 120°
--------------------	--------

