

The Sill light fixture uniformly illuminates the outer ledge of windows, creating stunning lighting effects. Its die-cast aluminum housing ensures excellent thermal management. With its high lumen output, it is suitable for a wide range of indoor and outdoor lighting applications.

MATERIAL

Body : Pressure die-cast aluminium alloy
Impact Protection : IK08
Ingress Protection : IP65
Lens : Polycarbonate optical lens
Gasket : Clear silicone gasket
Mounting : Wall / Ceiling - Surface

ELECTRICAL

Driver : Standard
Power Supply : Integral
Input Voltage : 230-240Vac / 50-60 Hz
Surge : 2.5KV

PRODUCT CONFIGURATIONS


Wattage : 6W
Light Distribution : Blade Effect (180°)
CCT : 2700K / 3000K / 4000K / 5700K
LED Life Time : L70 B10 60,000 H

AREA OF APPLICATION

Window frames, historical and artistic facades, Widely used in subways, Interior decoration, Outdoor facade lighting.

AVAILABLE FINISH

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey

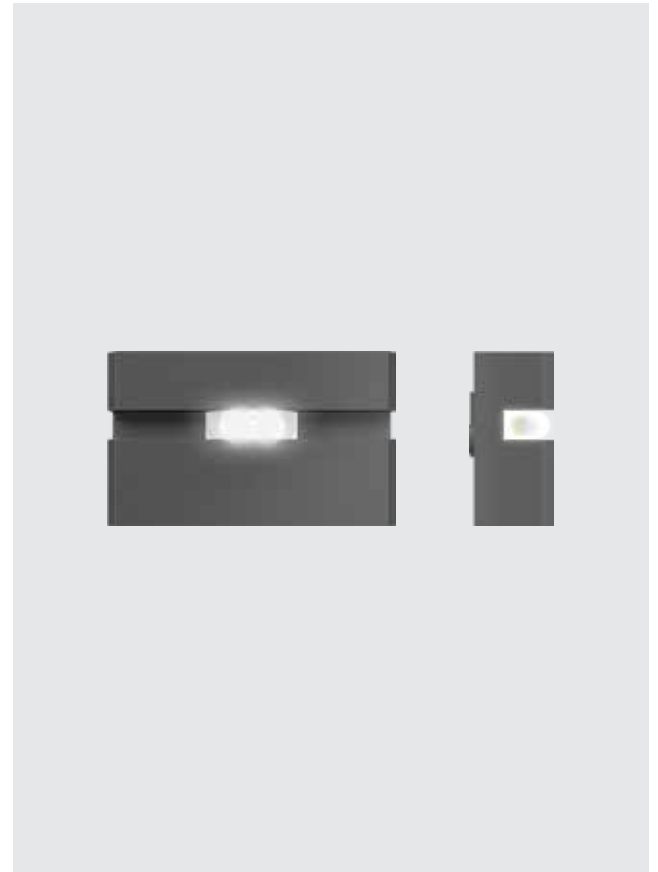



GAGAN MAHAL PALACE, HAMPI



Technical Specifications

General

ID	: 23078
System Wattage	: 6W LED
Driver Integrated	: Constant Current
Operating Voltage	: 100-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Physical


Body	: Die-Cast Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Wall / Ceiling - Surface
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: ≥0.95
THD	: <10%
Surge Protection	: 2.5KV

Optical Performance

Light Distribution	: Blade Effect (180°)
--------------------	-----------------------



Photometric Data



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in