

Facade luminaires with Hybrid optics, downwards for ambient lighting and orientation, upwards to accentuate architectural elements, Precise lighting for where it is required. Aesthetically shaped wall mounted luminaire with fully shielded light source for striking light effects.

Product Description

- Luminaire made of pressure die cast aluminium, extruded aluminium & non corrosive stainless steel fasteners.
- Clear toughened glass.
- Silicone gasket
- Hybrid optics with lens & reflector combination for higher efficiency, lower optical losses with optimum glare suppression.
- Die Cast aluminium base for easy installation onto the wall / column.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥ 80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-7897-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 6500K



Product Benefits

- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation with low maintenance.
- Clear glass in the front with continuous silicone gasket to ensure adequate sealing.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Residential, Building facade, Commercial centres, Passages, Pathways, Sculptures and Structures.

Available Finish


Pure polyester powder coated

RAL 9004 Signal black

RAL 9007 Grey aluminium


RAL 7016 Anthracite grey

Graphite grey

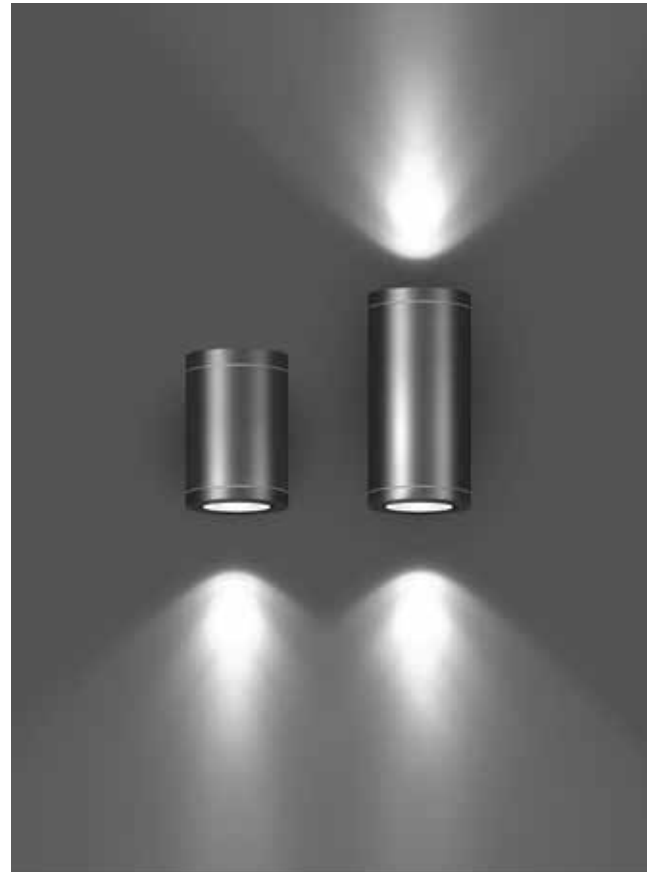



PARK HYATT, CHENNAI

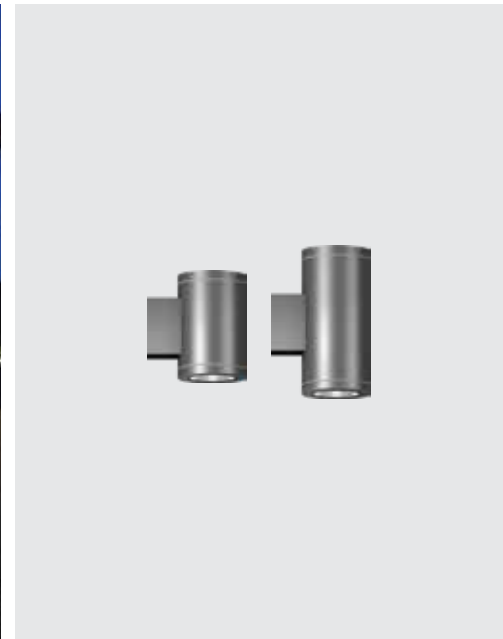

Technical Specifications

General

ID : 7897 / 7898
 System Wattage : 1 x 6W / 2 x 6W LED
 Driver Integral : Constant Current
 Operating Voltage : 100-300Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : CITIZEN COB
 CRI (Ra) : >80
 LED Colour Temperature : 2700K / 3000K/ 4000K
 6500K

Physical


Body : Extruded & die-cast aluminium
 Reflector : Mirror finish pure AL
 Diffuser : Clear toughened glass
 Mounting : Surface - Wall
 Finish : Powder coated
 RAL 9004 Signal black
 RAL 9007 Grey aluminium
 RAL 7016 Anthracite grey
 Graphite grey

Driver


Power Supply : Integral
 Input Voltage : 230-240Vac
 Frequency : 50-60 Hz
 Power Factor : ≥0.95
 THD : <15%
 Surge Protection : 4KV
 Efficiency : >80%

Optical Performance

Beam Angle : 15° / 25° / 40°



Cone Diagram

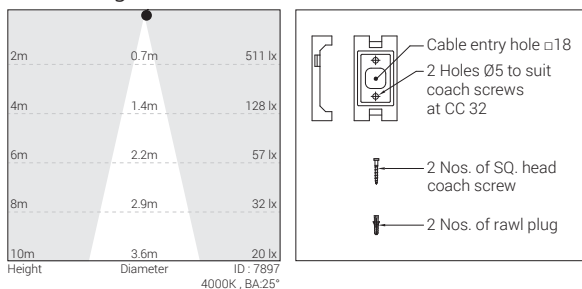

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in