




THIRUVALLUVAR STATUE, COIMBATORE

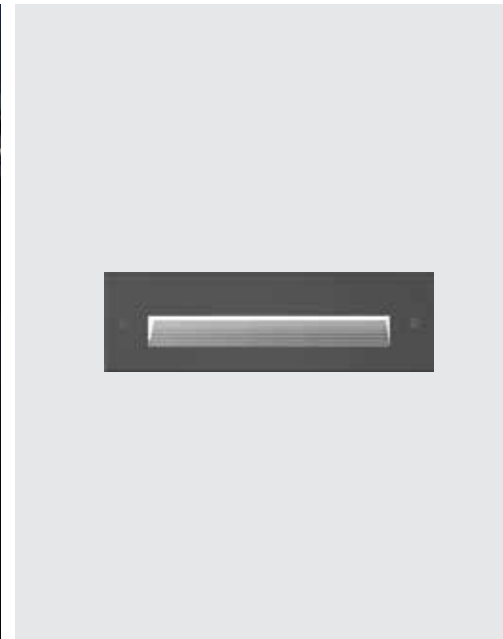

### Technical Specifications

#### General

ID	: 2757 / 2743
System Wattage	: 6W / 12W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

#### Light Source

Light Source	: NICHIA
CRI (Ra)	: ≥80 (>90 - On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

#### Physical


Body	: Die-Cast Aluminium
Diffuser	: Clear Acrylic
Gasket	: Silicone
Mounting Sleeve	: ABS Plastic
Mounting	: Wall - Recess
COD (mm)	: 240 x 83 x 70
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

#### Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: ≥0.90
THD	: <10%
Surge Protection	: 2KV / 2.5KV
Efficiency	: >85%

#### Optical Performance

Light Distribution	: Forward Asymmetrical
--------------------	------------------------



### Light Distribution



Applied Photometry : H=0.5m

#### Note:

- Recessed floor washer.
- Recommended installation height : 400 - 500 mm
- Recommended spacing : 4 metres

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)