


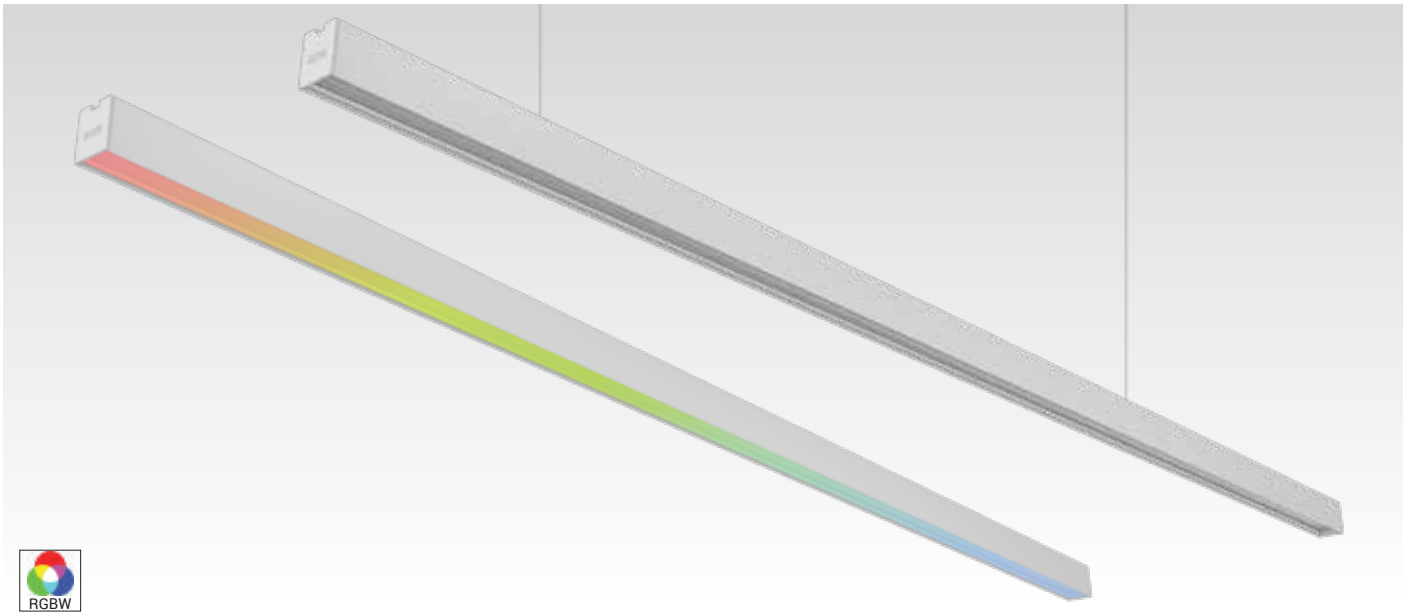

Technical Specifications

General

Driver	: Constant Voltage
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU

Light Source

Light Source	: Lumileds
CRI (Ra)	: >80 (>90 on request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K / RGBW

Optical

Tilt	: Fixed
Beam Angle	: 30° / 60°
Luminaire Efficiency	: Upto 70 lm/W / Upto 67 lm/W
Diffuser Material	: Clear PMMA extruded lens

Physical

Body	: Extruded Aluminium with Translucent Endcaps
Mounting	: Surface / Tilttable
Finish	: RAL 9004 Signal black RAL 9016 Traffic White

Specification

Power (W/m)	20W/m
Max.length (m)	2 mts



Ordering Guide

Pendant - Direct / Surface / Surface - RGBW

ID	Wattage	Dimension (mm)
2828	Upto 10W	520 x 21 x 26
2828	Upto 20W	1020 x 21x 26
2828	Upto 30W	1520 x 21x 26
2828	Upto 40W	2020 x 21x 26

Note : Luminaire operating voltage is 24Vdc, to be ordered with suitable power supply, controller and accessories.