

K-LiTE Wall Grazer

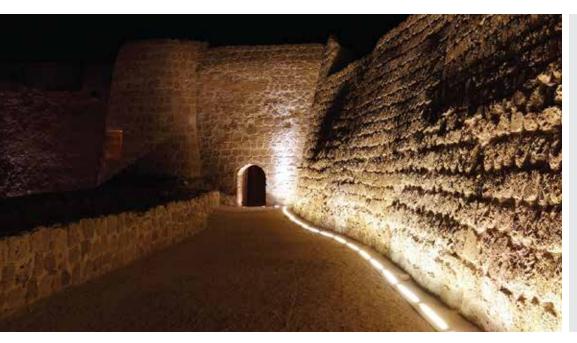



Technical Specifications General

ID System Wattage Driver Non Integral

: 3276 / 3274 : 12W / 24W LED : Constant Voltage

Operating Voltage Operating Temperature

: 24Vdc :-15°C~+50°C

Physical

Housing Front Cover Diffuser

: Extruded aluminium : 316 Grade Stainless Steel : Toughened Translucent

Glass

Mounting Sleeve : Recessed Powder

Coated Aluminium

COD (mm) : 540 x 68 x 80 Light Source

Light Source

CRI (Ra) LED Colour Temperature

:>80 (> 90 On Request) : 2700K / 3000K / 4000K 5700K


: LUMILED

Driver

Power Supply : Non Integral Dimmable Option : 1-10V / Dali

Optical

Beam Angle : 100°
















Photometric Data



Note: It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in