

Technical Specifications

General

| | |
|-----------------------|--------------------|
| ID | : 3277 |
| System Wattage | : 24W LED |
| Driver Non Integral | : Constant Voltage |
| Operating Voltage | : 24Vdc |
| Operating Temperature | : -15°C~+50°C |

Physical

| | |
|-----------------|------------------------------------|
| Housing | : Extruded Aluminium |
| Front Cover | : 316 Grade Stainless Steel |
| Diffuser | : Toughened Translucent Glass |
| Mounting Sleeve | : Recessed Powder Coated Aluminium |
| COD (mm) | : 1015 x 68 x 80 |

Light Source


| | |
|------------------------|---------------------------------|
| Light Source | : LUMILED |
| CRI (Ra) | : >80 (> 90 On Request) |
| LED Colour Temperature | : 2700K / 3000K / 4000K / 5700K |

Driver


| | |
|-----------------|----------------|
| Power Supply | : Non Integral |
| Dimmable Option | : 1-10V / Dali |

Optical

| | |
|------------|--------|
| Beam Angle | : 100° |
|------------|--------|

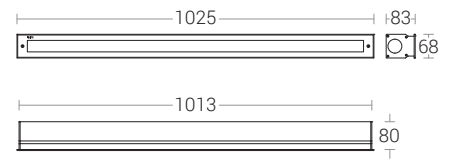

Photometric Data

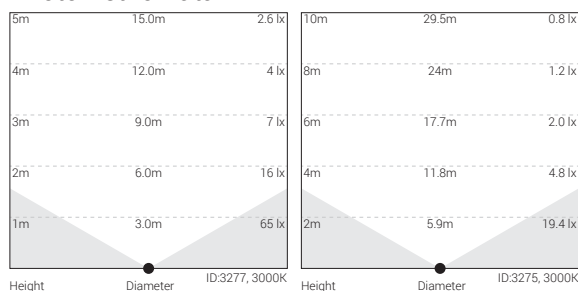

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in