


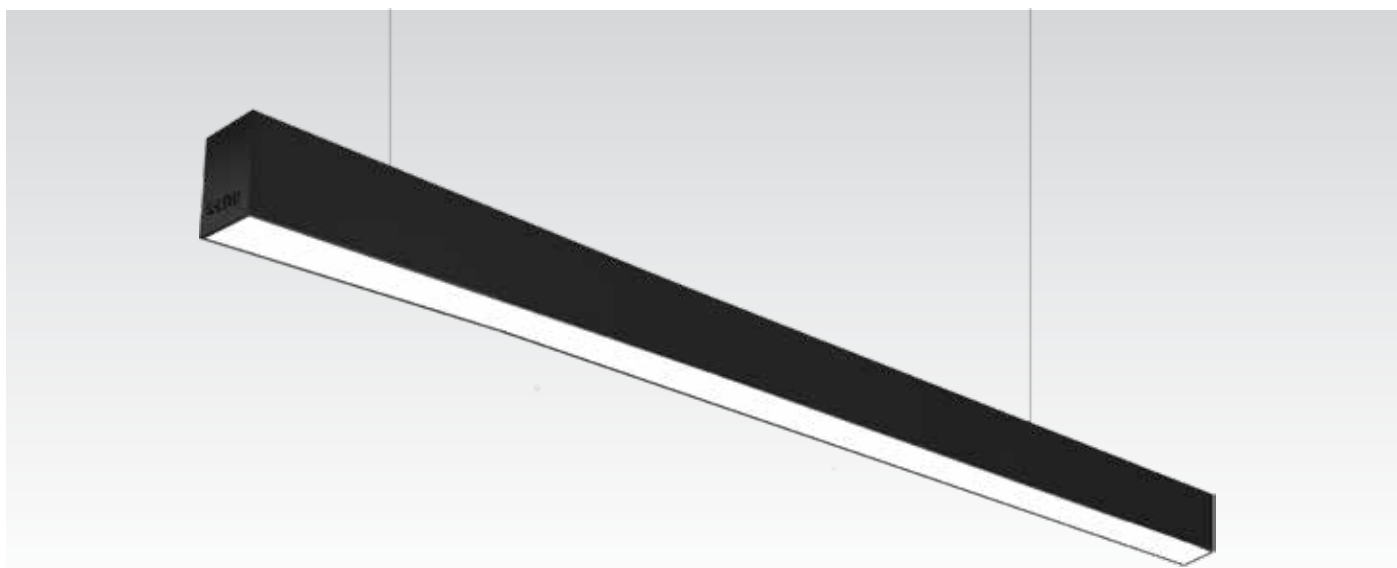

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 198-264Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Lumiled / Equivalent
LED Lumens	: 4500 lm / 6000 lm
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Optical

Tilt	: Fixed
Beam Angle	: 120°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal Matte / Prismatic
UGR	: <19

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Pendant
Finish	: RAL 9004 Signal black RAL 9016 Traffic White RAL 9007 Grey aluminium

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%



Ordering Guide

Direct - Opal Matte / Prismatic

ID	Wattage	Dimension (mm)
3412	Upto 40W	1210 x 50 x 70
3412	Upto 80W	2402 x 50 x 70

Direct - Indirect - Opal Matte

ID	Wattage	Dimension (mm)
3412	Upto 40W & 15W	1210 x 50 x 70
3412	Upto 80W & 30W	2402 x 50 x 70

Direct-Prismatic & Indirect-Opal Matte

ID	Wattage	Dimension (mm)
3412	Upto 40W & 15W	1210 x 50 x 70
3412	Upto 80W & 30W	2402 x 50 x 70