


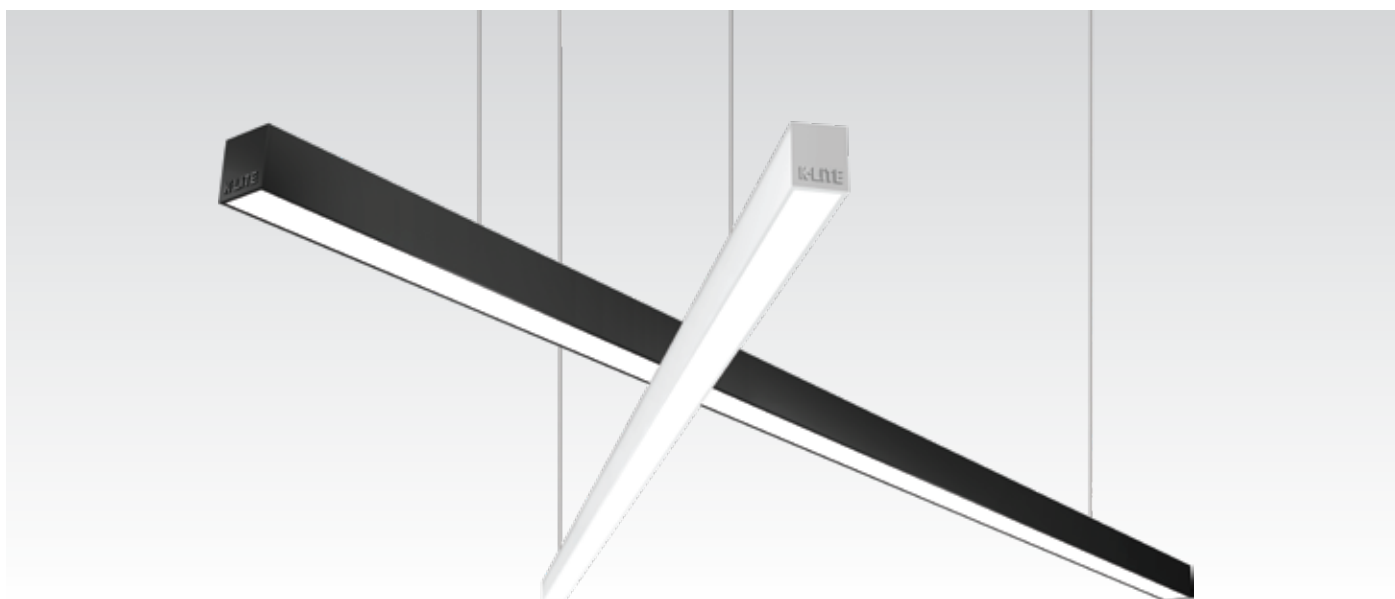

### Technical Specifications

#### General

|                       |                    |
|-----------------------|--------------------|
| Driver                | : Constant Current |
| Input Voltage         | : 220-240Vac       |
| Operating Temperature | : -15°C~+50°C      |

#### Light Source

|                        |                                 |
|------------------------|---------------------------------|
| Light Source           | : Bridgelux / Equivalent        |
| CRI (Ra)               | : >80 (>90 On Request)          |
| LED Colour Temperature | : 2700K / 3000K / 4000K / 5700K |

#### Optical

|                   |                 |
|-------------------|-----------------|
| Tilt              | : Fixed         |
| Beam Angle        | : 100°          |
| Diffuser Material | : Polycarbonate |
| Diffuser Finish   | : Opal          |

#### Physical

|          |                                                                              |
|----------|------------------------------------------------------------------------------|
| Body     | : Extruded Aluminium<br>with Die-cast Endcaps                                |
| Mounting | : Pendant                                                                    |
| Finish   | : RAL 9004 Signal black<br>RAL 9016 Traffic White<br>RAL 9007 Grey aluminium |

#### Driver

|                  |              |
|------------------|--------------|
| Power Supply     | : Integrated |
| Power Factor     | : >0.90      |
| THD              | : <10%       |
| Surge Protection | : Upto 3KV   |
| Efficiency       | : >85%       |



### Ordering Guide

#### Pendant - Direct

| ID   | Wattage  | Dimension (mm) |
|------|----------|----------------|
| 3497 | Upto 40W | 1210 x 25 x 27 |
| 3497 | Upto 80W | 2402 x 25 x 27 |

