



OPEN SOURCE



Technical Specifications

General

ID	: 4320
System Wattage	: 40W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -10°C~+50°C

Light Source

Light Source	: CREE
CRI (Ra)	: >80
LED Colour Temperature	: 3000K (Other CCT's on request)

Physical

Body	: 6063 Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Surface - Bracket
Finish	: Powder Coated RAL 7024 Graphite Grey


Driver

Power Supply	: Non Integral
--------------	----------------

Optical Performance

Beam Angle	: 2° / 20° / 10°x30°
------------	----------------------

8	CE	III	IP65	IK06	50,000 h L70 B10	SDCM ≤ 5
---	----	-----	------	------	---------------------	-------------

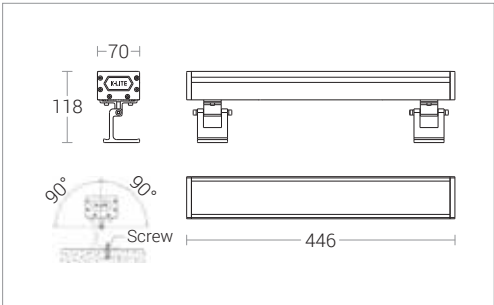



OPEN SOURCE



Technical Specifications

General

ID	: 4320
System Wattage	: 40W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -10°C~+50°C

Physical

Body	: 6063 Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Surface - Bracket
Finish	: Powder Coated RAL 7024 Graphite Grey

Light Source

Light Source	: CREE
CRI (Ra) for White light	: >80
LED Colour Temperature	: RGBW

Driver

Power Supply	: Non Integral
Control	: DMX512 compatibility

Optical Performance

Beam Angle	: 2° / 20° / 10°x30°
------------	----------------------

8	CE	III	IP65	IK06	50,000 h L70 B10	DMX	SDCM ≤ 5
---	----	-----	------	------	---------------------	-----	-------------

