



Technical Specifications

General

ID	: 4329
System Wattage	: 50W LED
Driver Integrated	: Constant Current
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Recess
Finish	: Powder coated
	RAL 9004 Signal black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	RAL 9016 Traffic white
	Graphite grey

Light Source


Light Source	: NICHIA
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%
Dimmable Option	: Analog / Dali

Optical Performance

Beam Angle	: 10° / 28° / 45°
------------	-------------------

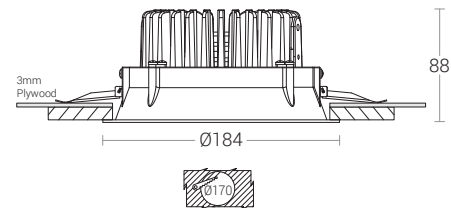

Cone Diagram

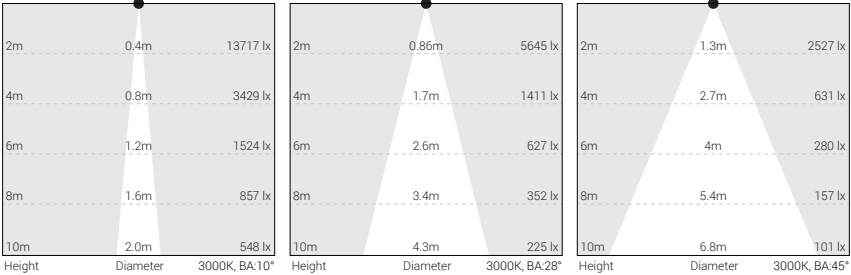

Note : Plywood not in our scope of supply