



Technical Specifications

General

ID	: 4392
System Wattage	: Upto 100W LED
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50Hz
Operating Voltage	: 120-270Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for Mounting on 60mm OD pipe
Finish	: Powder coated Graphite grey Anthracite grey / Jet black

Light Source


Light Source	: LUMILED / Equivalent
CRI (Ra)	: ≥ 70 (>80 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6KV (Additional Surge Protection on Request)
Efficiency	: >85%

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 12031 lm, 12089 lm, 12503 lm
Optical Distribution	: Type II, Type III, Type IV
For other IES files - Please refer Online	

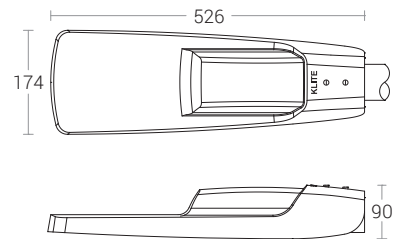

Note : • Luminous flux / Power consumption may vary by $\pm 10\%$.
• Luminaire efficiency upto 130 lm/W.

Photometric Data

