



OPEN SOURCE



Technical Specifications

General

ID	: 6798
System Wattage	: 3 x 60W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Bracket / Pole - Bracket
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source : LUMILEDS
CRI (Ra) : ≥70
LED Colour Temperature : 3000K / 4000K / 5700K
Amber (25°)

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.97
THD	: <5.3%
Surge Protection	: 4KV
Efficiency	: >90%
Dimmable Option	: Analog / Dali

Optical Performance


Beam Angle : 12° / 25° / 40° / 60°



Photometric Data

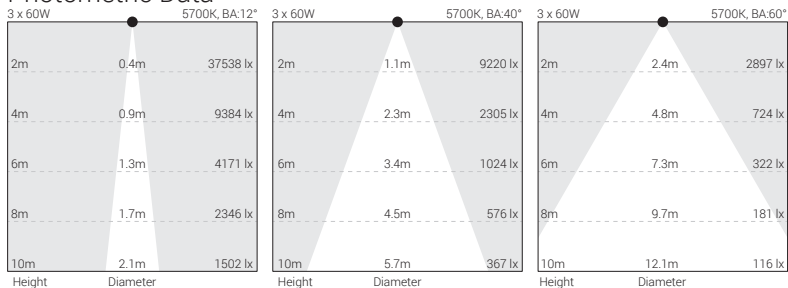

Accessories



Anti Glare Shield

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in