



TABLET INDIA RESIDENCE, BOAR CLUB, CHENNAI



Technical Specifications

General

ID : 7052 / 7057
System Wattage : 6W LED
Driver Non-Integral : Constant Voltage
Operating Voltage : 24Vdc
Operating Temperature : -15°C~+50°C

Physical

Body : Die-cast Aluminium Alloy
Diffuser : Clear Toughened Glass
Mounting : Spike / Die-cast Aluminium Bracket
Finish : Powder coated
RAL 9004 Signal black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey

Light Source


Light Source : LUMILED / OSRAM
CRI (Ra) : ≥80
LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

Driver

Power Supply : Non-Integral

Optical Performance

Beam Angle : 15° / 25° / 40°

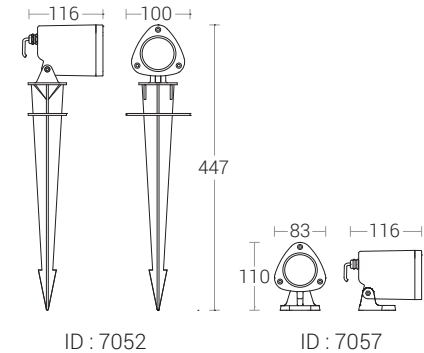

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



TABLET INDIA RESIDENCE, BOAR CLUB, CHENNAI



Technical Specifications

General

ID : 7052 / 7057
System Wattage : 6W LED
Driver Integral : Constant Current
Operating Voltage : 100-240Vac
Operating Temperature : -15°C~+50°C

Physical

Body : Die-cast Aluminium Alloy
Diffuser : Clear Toughened Glass
Mounting : Spike / Die-cast Aluminium Bracket
Finish : Powder coated
RAL 9004 Signal black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey

Light Source


Light Source : LUMILED / OSRAM
CRI (Ra) : ≥80
LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

Driver


Power Supply : Integral
Input Voltage : 230-240Vac
Frequency : 50-60 Hz

Optical Performance

Beam Angle : 15° / 25° / 40°

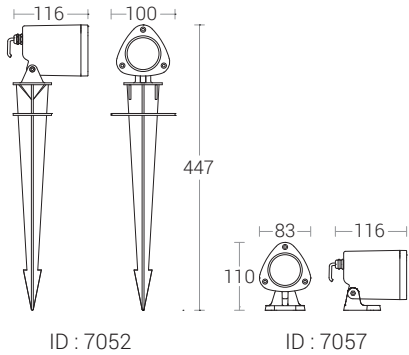

Photometric Data

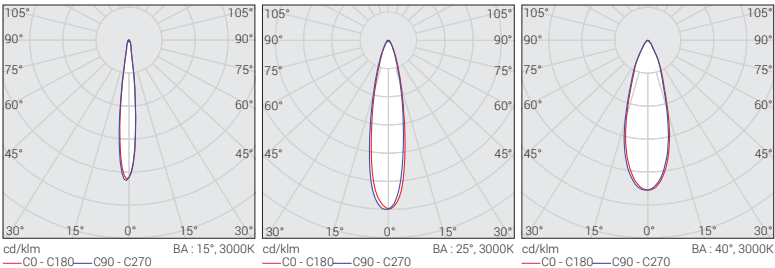

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in