




PARK HYATT, CHENNAI

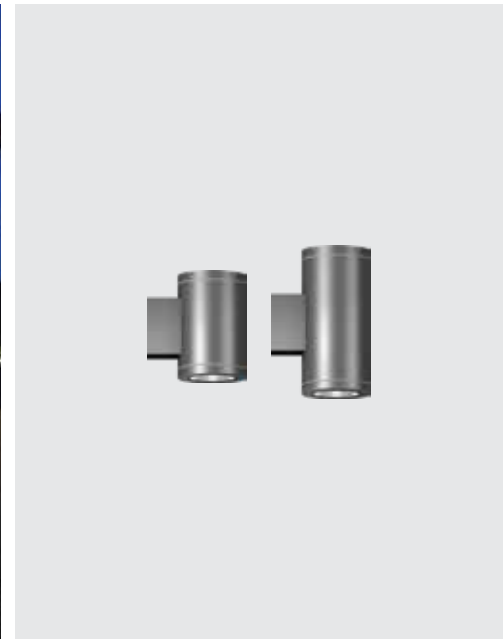

Technical Specifications

General

ID : 7897 / 7898
 System Wattage : 1 x 6W / 2 x 6W LED
 Driver Integral : Constant Current
 Operating Voltage : 100-300Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : CITIZEN COB
 CRI (Ra) : >80
 LED Colour Temperature : 2700K / 3000K/ 4000K
 6500K

Physical


Body : Extruded & die-cast aluminium
 Reflector : Mirror finish pure AL
 Diffuser : Clear toughened glass
 Mounting : Surface - Wall
 Finish : Powder coated
 RAL 9004 Signal black
 RAL 9007 Grey aluminium
 RAL 7016 Anthracite grey
 Graphite grey

Driver


Power Supply : Integral
 Input Voltage : 230-240Vac
 Frequency : 50-60 Hz
 Power Factor : ≥0.95
 THD : <15%
 Surge Protection : 4KV
 Efficiency : >80%

Optical Performance

Beam Angle : 15° / 25° / 40°



Cone Diagram

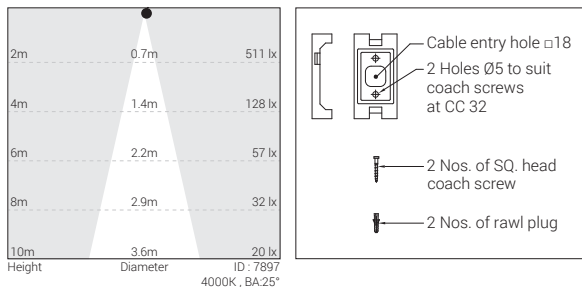

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in